

Handtaster
Hand switch


Netzkabel
Power cable

Motorbuchsen
Motor channels

Schaltleiste oder Sync-Kabel
Safety strip or Sync cable

elektrische Erdung
electrical grounding

12.5

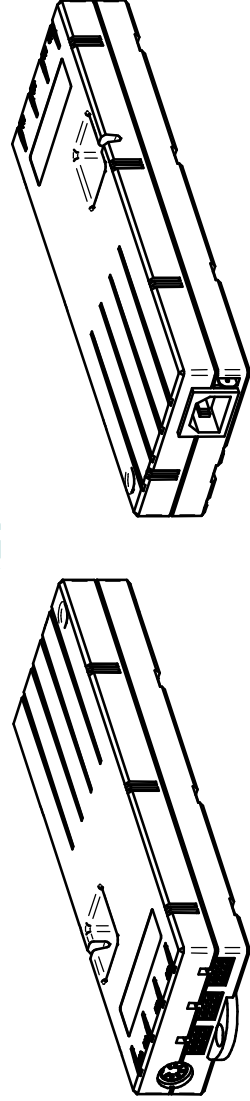

Mögliche Artikelnr. Possible article no.	Benennung: Steuerung ... Name: Control box ...	Parameterfile
124.302xx	Compact3-eco 110V V2xx	V2xx
124.305xx	Compact3-eco 110V V5xx	V5xx
124.306xx	Compact3-eco 110V V6xx	V6xx
124.312xx	Compact3-eco 110V V12xx	V12xx
124.337xx	Compact3-eco 110V V37xx	V37xx

Technische Daten / technical specifications	
Versorgungsspannung / supply voltage	90 ... 127 V AC / 50 ... 60 Hz / 5 A
Standby Leistung primär / standby power primary	≤0.3 W
Leistung / power	360 VA
Umgebungstemperatur / ambient temperature	+10 ... +40 °C
Luftfeuchtigkeit (bei Betrieb) / Humidity	max. 85% (nicht kondensierend) / (not condensing)
Schutzklasse / Protection class (DIN EN 60529)	IP 20
Performance Level (DIN EN 13849-1)	PL b

Index	Datum / Date	Name	Änderungsmittlung / notification of change
GEZEICHNET / DRAWN	07.02.2023	tlho	0.540 kg
GEPRÜFT / CHECKED	07.02.2023	miro	12
TECHNISCHE DATEN / TECHNICAL DATA			124.3xxx
ARTIKELNUMMER / ARTICLE NUMBER			124.3xxx
FORMAT			A3